

Stabil D-3G Silicone Lined


Product Description -

For soundproof installation of pipes required for all M&E services in industrial, residential and public buildings (as per DIN 4109).

Sizes 14 to 115 mm are equipped with welded nuts for the clamping bolts. On the joint side, the clamping bolt is pre-assembled; the clamping bolt on the opposite side is mounted into the bore hole and retained by a plastic washer, thus preventing any accidental unscrewing.

For sizes 124 mm and larger the clamping bolts and the required nuts are supplied in loose form.

With welded 3G triple thread nut; with silicone sound absorption lining. Sizes 3/8" and 1/2": the silicone lining is only included in the pack, not fitted into the clamps.

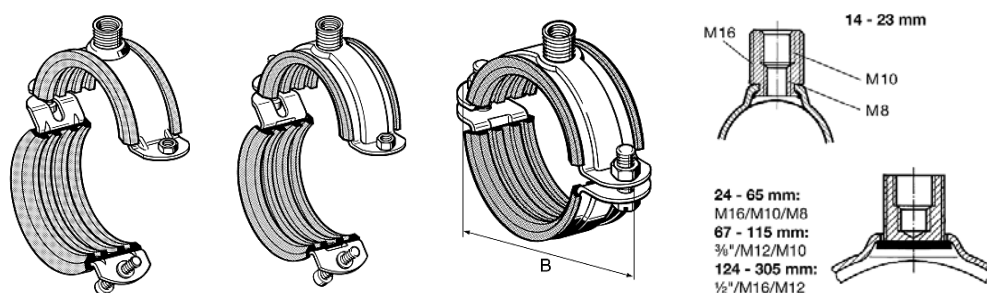

Technical Data

Size [mm]	Working load (tension)
14 – 23	1.8 kN
24 – 155	2.0 kN
124 – 162	2.9 kN
165 – 305	8.0 kN

Size range [mm]	NB	Material W x th [mm]	Thread connection	B [mm]	W [kg]	Quantity [pack]	Part-No.
14 - 18	3/8"	25 x 2.0	M16/M10/M8	62	0.08	50	108070
19 - 23	1/2"	25 x 2.0	M16/M10/M8	68	0.09	50	108089
24 - 28	3/4"	30 x 2.5	M16/M10/M8	75	0.13	50	108098
29 - 33	1 "	30 x 2.5	M16/M10/M8	81	0.14	50	108104
33 - 37		30 x 2.5	M16/M10/M8	85	0.15	50	108113
40 - 45	1 1/4"	30 x 2.5	M16/M10/M8	93	0.16	50	108122
47 - 52	1 1/2"	30 x 2.5	M16/M10/M8	104	0.19	50	108131
53 - 58		30 x 2.5	M16/M10/M8	110	0.20	50	108140
60 - 65	2"	30 x 2.5	M16/M10/M8	117	0.21	50	108159
67 - 72		30 x 3.0	3/8\"/M12/M10	144	0.31	25	108168
73 - 78	2 1/2"	30 x 3.0	3/8\"/M12/M10	150	0.33	25	108177
79 - 85		30 x 3.0	3/8\"/M12/M10	156	0.32	25	108186
88 - 93	3"	30 x 3.0	3/8\"/M12/M10	164	0.37	25	108195
100 - 106		30 x 3.0	3/8\"/M12/M10	178	0.40	25	108201
108 - 115	4"	30 x 3.0	3/8\"/M12/M10	187	0.43	25	108210
124 - 129		40 x 4.0	1/2\"/M16/M12	210	0.87	10	108229
131 - 137		40 x 4.0	1/2\"/M16/M12	218	0.91	10	108238
138 - 144	5"	40 x 4.0	1/2\"/M16/M12	225	0.94	10	108274
148 - 154		40 x 4.0	1/2\"/M16/M12	235	1.00	10	108283
156 - 162		40 x 4.0	1/2\"/M16/M12	243	1.05	10	108292
165 - 171	6"	40 x 4.0	1/2\"/M16/M12	255	1.14	10	108308
177 - 183		40 x 4.0	1/2\"/M16/M12	265	1.18	10	108317
188 - 194		40 x 4.0	1/2\"/M16/M12	276	1.23	10	108326
196 - 203		40 x 4.0	1/2\"/M16/M12	287	1.30	10	154947
205 - 214		40 x 4.0	1/2\"/M16/M12	296	1.40	10	149879
219 - 225	8"	40 x 4.0	1/2\"/M16/M12	307	1.40	10	108335
244 - 250		40 x 4.0	1/2\"/M16/M12	332	1.51	10	108344
267 - 273	10"	40 x 4.0	1/2\"/M16/M12	355	1.71	10	108353
299 - 305		40 x 4.0	1/2\"/M16/M12	387	1.79	10	108362