


Stabil D-3G Lined

Product Description -

For soundproof installation of pipes required for all M&E services in industrial, residential and public buildings.

Sizes 14 to 115 mm are equipped with welded nuts for the clamping bolts. On the joint side, the clamping bolt is pre-assembled; the clamping bolt on the opposite side is mounted into the bore hole and retained by a plastic washer, thus preventing any accidental unscrewing.

For sizes 124 and larger the clamping bolts and the required nuts are supplied in loose form.

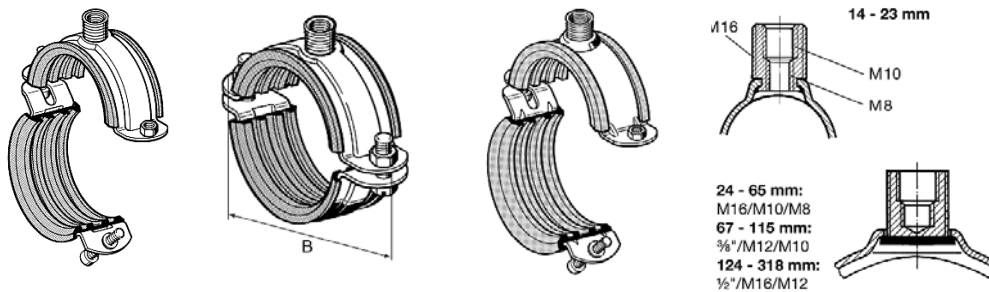

Technical Data

Size [mm]	Working load (tension)
14 - 23	1.8 kN
24 - 155	2.0 kN
124 - 162	2.9 kN
165 - 8.0	8.0 kN

Size Range (mm)	NB	Material WxTh (mm)	Thread Connection	B (mm)	W (kg)	Quantity (pack)	Part No.
14 - 18	3/8"	25 x 2.0	M16/M10/M8	62	0.08	50	107680
19 - 23	1/2"	25 x 2.0	M16/M10/M8	68	0.09	50	107699
24 - 28	3/4"	30 x 2.5	M16/M10/M8	75	0.12	50	107255
29 - 33	1"	30 x 2.5	M16/M10/M8	81	0.14	50	107264
33 - 37		30 x 2.5	M16/M10/M8	85	0.15	50	107273
40 - 45	1 1/4"	30 x 2.5	M16/M10/M8	93	0.17	50	107282
47 - 52	1 1/2"	30 x 2.5	M16/M10/M8	104	0.19	50	107291
53 - 58		30 x 2.5	M16/M10/M8	110	0.19	50	107307
60 - 65	2"	30 x 2.5	M16/M10/M8	117	0.21	50	107316
67 - 72		30 x 3.0	3/8"/M12/M10	144	0.3	25	107325
73 - 78	2 1/2"	30 x 3.0	3/8"/M12/M10	150	0.31	25	107334
79 - 85		30 x 3.0	3/8"/M12/M10	156	0.33	25	107343
88 - 93	3"	30 x 3.0	3/8"/M12/M10	164	0.36	25	107352
100 - 106		30 x 3.0	3/8"/M12/M10	178	0.39	25	107361
108 - 115	4"	30 x 3.0	3/8"/M12/M10	187	0.42	25	107370
124 - 129		40 x 4.0	1/2"/M16/M12	210	0.89	10	107389
131 - 137		40 x 4.0	1/2"/M16/M12	218	0.93	10	107398
138 - 144	5"	40 x 4.0	1/2"/M16/M12	225	0.96	10	107404

Size Range (mm)	NB	Material WxTh (mm)	Thread Connection	B (mm)	W (kg)	Quantity (pack)	Part No.
148 - 154		40 x 4.0	1/2"/M16/M12	235	1	10	107413
156 - 162		40 x 4.0	1/2"/M16/M12	243	1.05	10	107422
165 - 171	6"	40 x 4.0	1/2"/M16/M12	255	1.18	10	107431
177 - 183		40 x 4.0	1/2"/M16/M12	265	1.23	10	107440
188 - 194		40 x 4.0	1/2"/M16/M12	276	1.25	10	107459
196 - 203		40 x 4.0	1/2"/M16/M12	287	1.32	10	148911
205 - 214		40 x 4.0	1/2"/M16/M12	296	1.35	10	148920
219 - 225	8"	40 x 4.0	1/2"/M16/M12	307	1.41	10	107468
244 - 250		40 x 4.0	1/2"/M16/M12	332	1.55	10	107477
267 - 273	10"	40 x 4.0	1/2"/M16/M12	355	1.62	10	107486
278 - 284		40 x 4.0	1/2"/M16/M12	366	1.67	10	112718
299 - 305		40 x 4.0	1/2"/M16/M12	387	1.8	10	107495
307 - 318 *		40 x 4.0	1/2"/M16/M12	400	1.95	10	189974