Standard U-Bolts

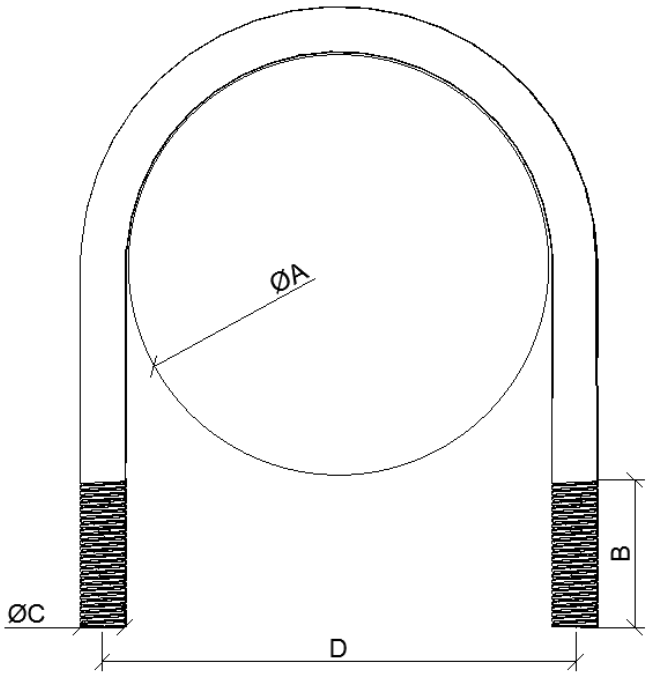

Product Description -

Metal fixing in the form of the letter 'U' which has a thread on both ends allowing screw bolt closure to clamp against a surface. Commonly used to clamp or guide pipe and tubing. Each U-Bolt supplied complete with 2 nuts and washers.

Product Finishes -

- Mild Steel
- Mild Steel – Painted
- Mild Steel – Bright Zinc Plated (BZP)
- Mild Steel – Galvanized (HDG)
- Stainless Steel

Extras -

- Rubber lined protective strip
- Nylon Backing Strip
- Polypropylene / Rubber Sleeve
- Hardwood Block / Calcium Insulation
- Galvanized Sleeve

Table of Standard Sizes -

Dimension A	Dimension B		Dimension C		Dimension D	
Pipe Size NB (O/D)	Type A	Type B	Type A	Type B	Type A	Type B
15NB (21.3mm)	30	30	M6	M10	28	32
20NB (26.7mm)	30	30	M6	M10	35	39
25NB (33.4mm)	30	30	M6	M10	41	45
32NB (44.2mm)	40		M10		56	
40NB (48.3mm)	40		M10		60	
50NB (60.3mm)	40		M10		72	
65NB (76.1mm)	40		M10		88	
80NB (89.9mm)	40		M12		103	
100NB (114.3mm)	40		M12		128	
125NB (141.3mm)	40		M12		157	
150NB (168.3mm)	50		M12		183	
200NB (219.3mm)	50		M16		239	
250NB (273.0mm)	50		M16		293	
300NB (323.8mm)	50		M16		344	
350NB (355.6mm)	75		M16		376	
400NB (406.4mm)	85		M16		428	
450NB (457.2mm)	85		M16		478	
500NB (508.0mm)	85		M16		530	
550NB (558.8mm)	85		M16		581	
600NB (609.6mm)	90		M20		636	
650NB (660.4mm)	90		M20		688	
700NB (711.2mm)	90		M20		739	